

Specification:

Current Rating : 1.5 Amp AC/DC.
 Withstanding Voltage: 30V AC/DC.
 Insulation Resistance: 1000MOHM Min.
 Contact Resistance: 30m ohm Max.
 Operating Temperature:-55° C ~+85° C.


Material:

Insulator: PBT+30% Glass Fiber (UL94V-0).
 Contact: Brass Strap(C2680) T=0.20.
 Contact Plated : Gold or Tin over Nickel Plated.
 Shell: SPCC, T=0.30, Nickel Plated.
 Color: Black / White

Ordering Information

BT MUSB M 5 F B C B B05

USB Type M: Male Contact Plating
 F=Gold Flash/Tin
 J=15u"Gold/Tin
 K=30u"Gold/Tin
 C: Crimp Color Insulator
 B=Black
 W=White

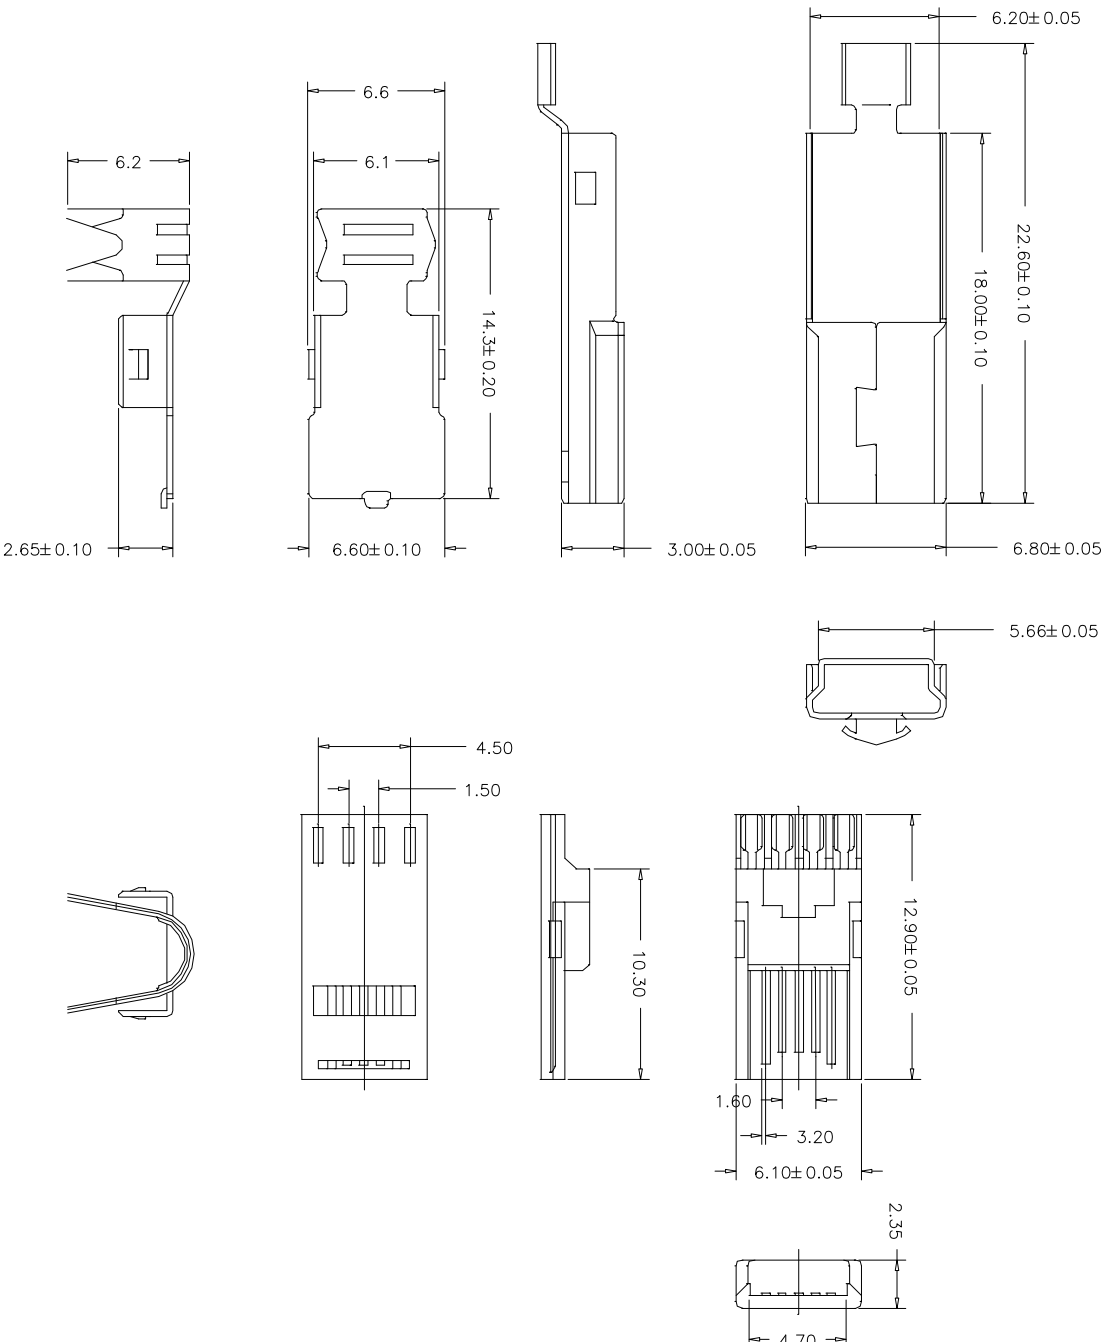

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | DRAW | Zhangyali lin | 09/01/18 | SCALE | UNIT | PART NO. | TITLE: |
|-----|----------|--------------------------|--------|---------|---------------------------------|---------|---------------|----------|-------|------|-------------------------------|----------------------|
| A0 | 09/01/18 | NEW | | | XX ±0.25 | DESIGN | | | mm | A4 | BTMUSBM5*BCBB05 | BMA TECHNOLOGIES LTD |
| | | | | | XXX ±0.15 | CHECK | Fanyi jun | | | | | |
| | | | | | X XXX ±0.05 Angle ± 5° | APPROVE | Bill | | | | MUSB B/M Crimp Type(3 Pieces) | |
| | | | | | DIM TOL | | | | | | | |

