
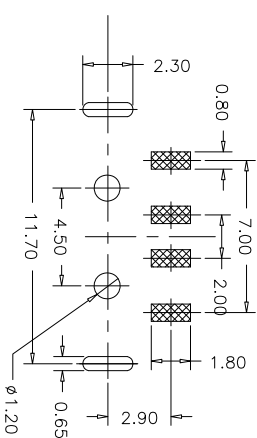

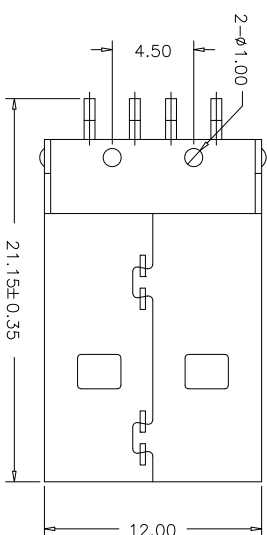


Specification:
 Current Rating : 1.0 Amp Max.
 Voltage Rating: 30V AC/DC(rms).
 Withstanding Voltage: 500V DC/1minute.
 Insulation Resistance: 100M Ω Min.
 Contact Resistance: 30m Ω Max.
 Operating Temperature: -40° C ~+85° C.

Material:
 Insulator: LCP(VECTRA) or PBT+30% Glass Fiber.
 Contact: Brass Strap(C2680) T=0.20.
 Contact Plated : Gold or Tin over Nickel Plated.
 Shell: SPCC, T=0.30, Nickel Plated.
 Color: Black / White / Beige

Mechanical Characteristics:
 Contact Insertion Force: 3.57 Kgf Max.
 Contact Separation Force: 1.0 Kgf Min.



Ordering Information

BT USB A M M * E A 1 B08

USB B Type M: Male M: SMT Contact Plating Insulator Color A Type
 F=Gold Flash/Tin B=Black
 J=15μ"Gold/Tin W=White
 K=30μ"Gold/Tin E=Beige

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.	TITLE:
A0	09/01/18	NEW			XX ±0.30	Fanyijun	—	BTUSBAM**A1B08	USB A/M SMT Type, w/Post, Long Foot
					XXX ±0.20	DESIGN	mm		
					X XXX ±0.05	CHECK	A4		
					Angle ± 5'	APPROVE	1/1		
					DIM TOL				

