
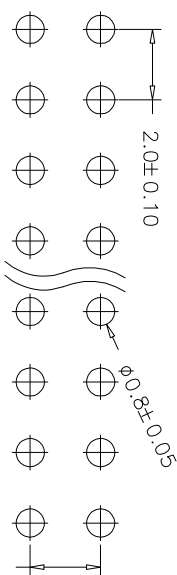


HSPF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
 Current Rating: 1AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 100MΩ min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze(C5191)
 Contact plating: Gold Flash All Over Nickel.
 Insulator Material: Polyester (UL94V-0)
 Standard: PA46

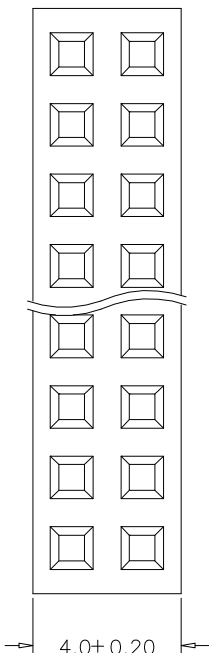

Ordering Information

BT2243 2 ** * E 1 A03



No. of Pins
04~80

Contact Plating
U=Gold Flash
X=10u"Gold
W=15u"Gold
Y=20u"Gold
Z=30u"Gold

Insulation & Packing
A: PBT, Tray
B: PBT, Tube
D: PBT, PE Bag
E: PA46, Tube
F: PA46, Tray
H: PA46, PE Bag
J: PA6T, Tube

Contact Shape
1: Straight

F=Gold Flash/Tin
A=10u"Gold/Tin
J=15u"Gold/Tin
K=30u"Gold/Tin
S=Tin Plated
N=Nickel Plated

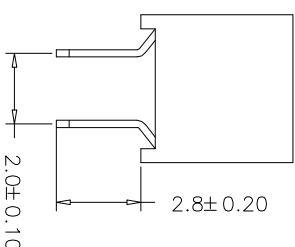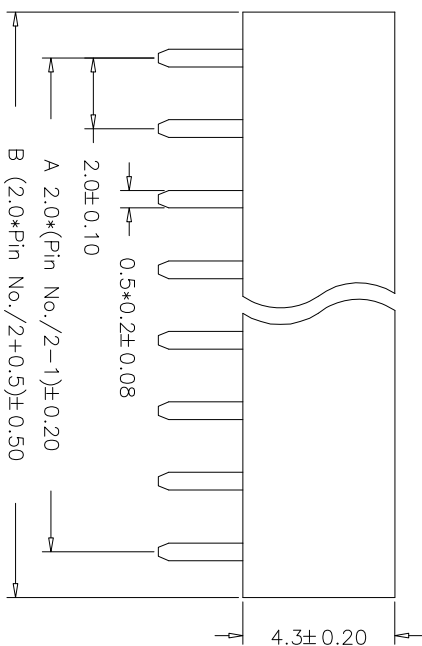

Pin No.	DIMENSION	
	A	B
2*2	2.0	4.5
2*3	4.0	6.5
2*4	6.0	8.5
2*5	8.0	10.5
2*6	10.0	12.5
2*7	12.0	14.5
2*8	14.0	16.5
⋮	⋮	⋮
2*40	78.0	80.5

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.
A0	09/01/31	NEW			XX ±0.45 XXX ±0.30 X XXX ±0.20	Zhangyali in DESIGN CHECK	mm A4	BT22432***E1A03
					Angle ± 3'	CHECK	1/1	
					DWG	APPROVE	PROJ.	TITLE:
								2.00mm Pitch Double Row Female Header 180° H=4.30



BWA TECHNOLOGIES LTD