

HSH

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Specification:






- Current Rating: 3.0AMP
- Contact Resistance: 30mΩ max
- Insulation Resistance: 1000mΩ Min
- Withstand Voltage: 500V AC
- Operation Temperature: -55°C to +105°C

Material:

Contact Material: Phosphor Bronze.
Insulator Material: PA6T(UL94V-0)

Ordering Information

BT2272 2 ** * A 1 A03

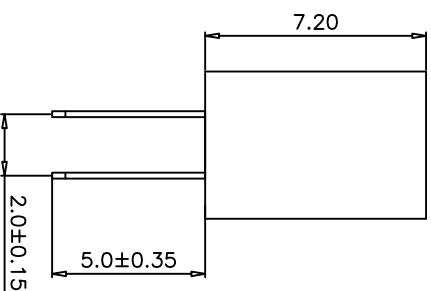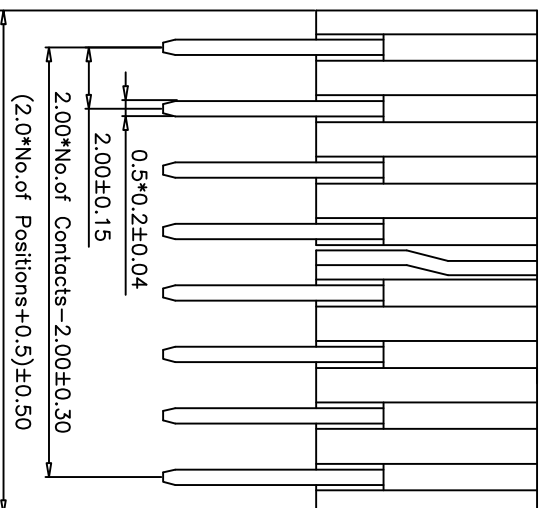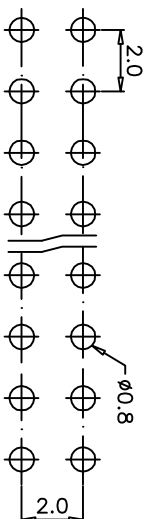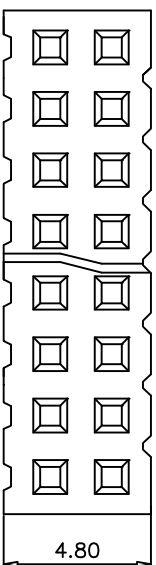

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	Atong	09/01/18	SCALE		SHEET	PART NO.	TITLE:
					X.X	±0.40				UNIT	PROJ.			
A0	09/01/18	NEW			X.XX	±0.25	DESIGN			mm	1/1	BT2272**A1A03		
					X.XXX	±0.15	CHECK	Yai lin		A4				
					Angle	± 3'	APPROVE	CK						
					DIM	TOL								



Fig 2.0 Dual Row DIP=5.0mm