

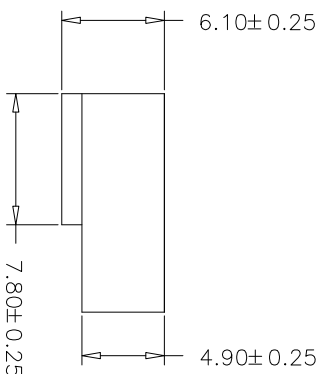


- NOTES:
- Rated Current: 3.0AMP
  - Rated Voltage: 250V AC,DC
  - Contact Resistance: 20m\U+2126 max
  - Insulation Resistance: 1000M\U+2126 min
  - Withstanding Voltage: 1500V AC/Minute
  - Operation Temperature: -25°C to +85°C
  - Insulator Material: Nylon66, UL94V-0 or 94V-2
- Color: Beige

## Ordering Information

BT2541 H \*\* E 01 A02

No.Of Pins 02~16Pin	Colour B:Black E:Beige W:White	Packing 0-P:PE Bag 1-T:Tray 2-T:Tube 3-T: Tape&Reel
------------------------	---	---

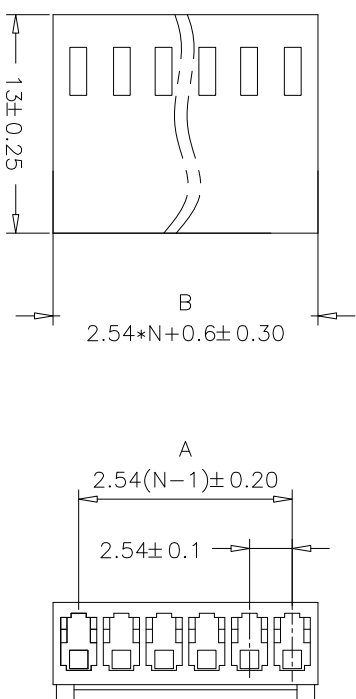

PART NO.	Dimensions	
	A	B
BT2541H02E01	2.54	5.68
BT2541H03E01	5.08	8.22
BT2541H04E01	7.62	10.76
BT2541H05E01	10.16	13.30
BT2541H06E01	12.70	15.84
BT2541H07E01	15.24	18.38
BT2541H08E01	17.78	20.92
BT2541H09E01	20.32	23.46
BT2541H10E01	22.86	26.00
BT2541H11E01	25.40	28.54
BT2541H12E01	27.94	31.08
BT2541H13E01	30.48	33.62
BT2541H14E01	33.02	36.16
BT2541H15E01	35.56	38.70
BT2541H15E01	38.10	41.24

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	Zhangyalin	09/01/12	SCALE		PART NO.	TITLE:
					XX	±0.40				UNIT	mm		
A0	09/01/12	NEW			XXX	±0.25	DESIGN			A4		BT2541H**E01A02	
					Angle	± 3'	CHECK			1/1			
					DWG	TOL	APPROVE						



BMA TECHNOLOGIES LTD  
WX2 54mm Pitch Housing