




**NOTES:**

- Rated Current: 3.0AMP
  - Rated Voltage: 250V AC/DC
  - Insulation Resistance: 1000M\U+2126 /min
  - Withstanding Voltage: 1000V AC/Minute
  - Operation Temperature: -25°C to +85°C
  - Insulator Material: Nylon66, UL94V-0
- Or UL94V-2, Color: Black

## Ordering Information

BT2542 H \* \* B 03 A02

No.Of Pins	Colour	Packing
02~12Pin	B:Black	0:PE Bag
	E:Beige	1:Tray
	W:White	2:Tube
		3:Tape&Reel

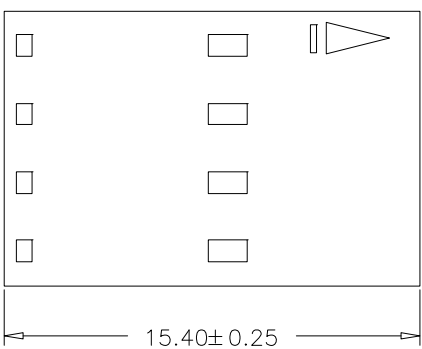

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	HEMING	SCALE	PART NO.
A0	09/01/12	NEW			XX ±0.40	DESIGN	09/01/12	mm	BT2542H**B03A02
					XXX ±0.25	CHECK		A4	
					X.XXX ±0.15	Fanyijun		1/1	
					Angle ± 3'	Billi		PROL.	
					DM			TITLE:	MX2.54 CD-ROM Housing



BMA TECHNOLOGIES LTD