



# HSP

**NOTES:**



- Rated Current: 2.0A AC,DC
- Rated Voltage: 125V AC,DC
- Contact Resistance: 20m\U+2126 max
- Insulation Resistance: 1000M\U+2126 min
- Withstanding Voltage: 800V AC/Minute
- Operation Temperature: -25°C to +85°C
- Insulator Material: PBT+15%GF UL94V-0

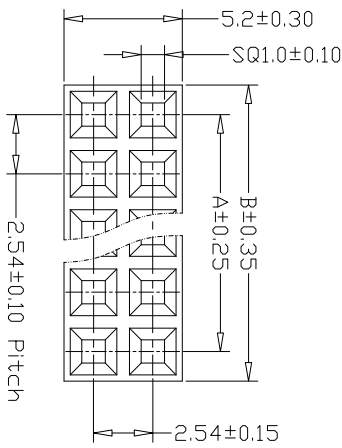

## Ordering Information

**BT2543 2 H \* \* B 01A29**

- No of Row: 2: Dual Row
- No Of Pins: 02-32Pin
- Colour: B:Black, E:Beige, W:White
- Packing: 0:PE Bag, 1:Tray, 2:Tube, 3:Tape&Reel

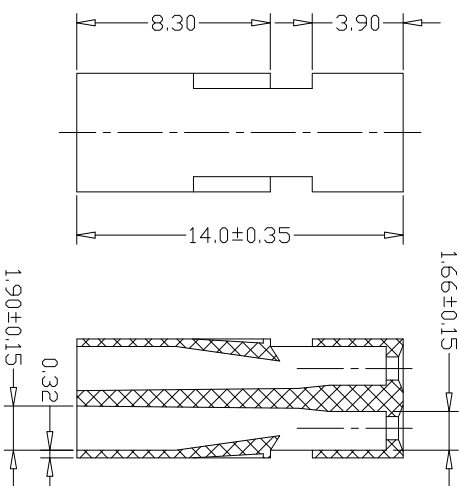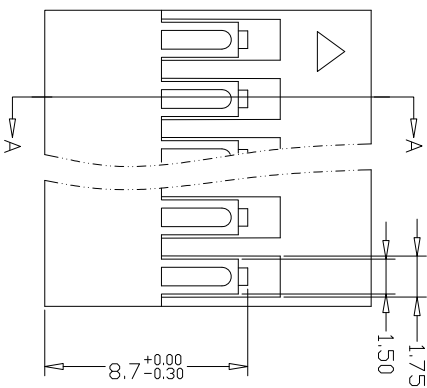

**Section B-B**

PART NO.	Dimensions	
	A	B
BT25432H04B01A29	2.54	5.20
BT25432H06B01A29	5.08	7.62
BT25432H08B01A29	7.62	10.16
BT25432H10B01A29	10.16	12.70
BT25432H12B01A29	12.70	15.24
BT25432H14B01A29	15.24	17.78
BT25432H16B01A29	17.78	20.32
BT25432H18B01A29	20.32	22.86
BT25432H20B01A29	22.86	25.40
BT25432H22B01A29	25.40	27.94
BT25432H24B01A29	27.94	30.48
BT25432H26B01A29	30.48	33.02
BT25432H28B01A29	33.02	35.56
BT25432H30B01A29	35.56	38.10
BT25432H32B01A29	38.10	40.64
BT25432H34B01A29	40.64	43.18
BT25432H36B01A29	43.18	45.72
BT25432H38B01A29	45.72	48.26
BT25432H40B01A29	48.26	50.80
BT25432H42B01A29	50.80	53.34
BT25432H44B01A29	53.34	55.88
BT25432H46B01A29	55.88	58.42
BT25432H48B01A29	58.42	60.96
BT25432H50B01A29	60.96	63.50
BT25432H52B01A29	63.50	66.04
BT25432H54B01A29	66.04	68.58
BT25432H56B01A29	68.58	71.12
BT25432H58B01A29	71.12	73.66
BT25432H60B01A29	73.66	76.20
BT25432H62B01A29	76.20	78.74
BT25432H64B01A29	78.74	81.28

OPERATION	DRAW	HEMING	SCALE	09/02/28	
				UNIT	mm
XX	±0.40				
XXX	±0.25	DESIGN			
XXXX	±0.15	CHECK			
Angle	± 3'	Fanyijun			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DWG	TOL	APPROVE	PROJ.	TITLE:	PART NO.	BT25432H**B01A29
A0	09/02/28	NEW						1/1			
1									BT25432H Pitch Housing		

