

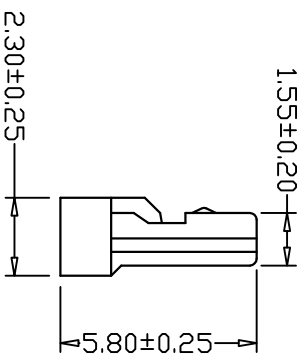
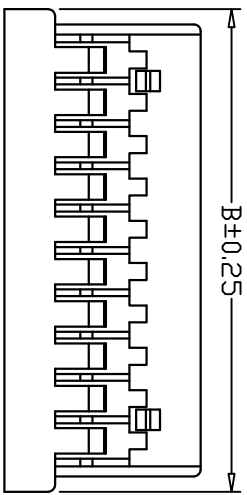
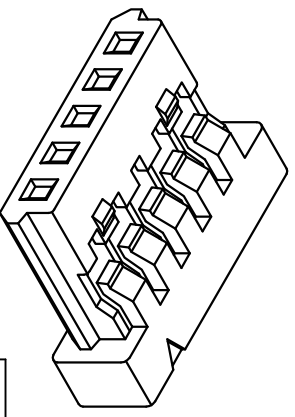


# HSF

**NOTES:**

- Rated Current: 1.0AMP
- Rated Voltage: 150V AC,DC
- Contact Resistance: 30mΩ max
- Insulation Resistance: 500MΩ min
- Withstanding Voltage: 500V AC/Minute
- Operation Temperature: -25°C to +85°C
- Insulator Material: Nylon, UL94V-0
- Color: Beige

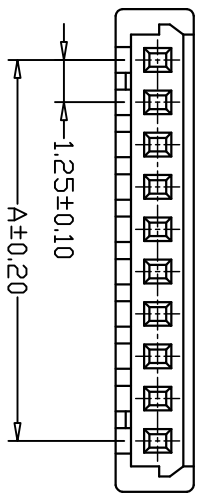

## Ordering Information

BT1255 H \*\* E 01 A04

No.Of Pins  
02-30Pin

Colour  
N=Nature  
W=White  
E=Beige

Packing  
0=PE Bag  
A=Tray  
T=Tube  
R=Tape&Reel

PART NO	Dimensions	
	A	B
BT1255H02E01A04	1.25	4.35
BT1255H03E01A04	2.50	5.60
BT1255H04E01A04	3.75	6.85
BT1255H05E01A04	5.00	8.10
BT1255H06E01A04	6.25	9.35
BT1255H07E01A04	7.50	10.60
BT1255H08E01A04	8.75	11.85
BT1255H09E01A04	10.00	13.10
BT1255H10E01A04	11.25	14.35
BT1255H11E01A04	12.50	15.60
BT1255H12E01A04	13.75	16.85
BT1255H13E01A04	15.00	18.10
BT1255H14E01A04	16.25	19.35
BT1255H15E01A04	17.50	20.60
BT1255H16E01A04	18.75	21.85
BT1255H17E01A04	20.00	23.10
BT1255H18E01A04	21.25	24.35
BT1255H19E01A04	22.50	25.60
BT1255H20E01A04	23.75	26.85
BT1255H21E01A04	25.00	28.10
BT1255H22E01A04	26.25	29.35
BT1255H23E01A04	27.50	30.60
BT1255H24E01A04	28.75	31.85
BT1255H25E01A04	30.00	33.10
BT1255H26E01A04	31.25	34.35
BT1255H27E01A04	32.50	35.60
BT1255H28E01A04	33.75	36.85
BT1255H29E01A04	35.00	38.10
BT1255H30E01A04	36.25	39.35



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.	1.25mm Pitch Housing
A0	09/01/23	NEW			X.X ±0.40 X.XX ±0.25 X.XXX ±0.15	DESIGN CHECK	mm A4	BT1255H**E01A04	
					Angle ± 3° DM	APPROVE	1/1		
					TOL	Bill			

1 2 3 4 5 6 7 8 9 10