
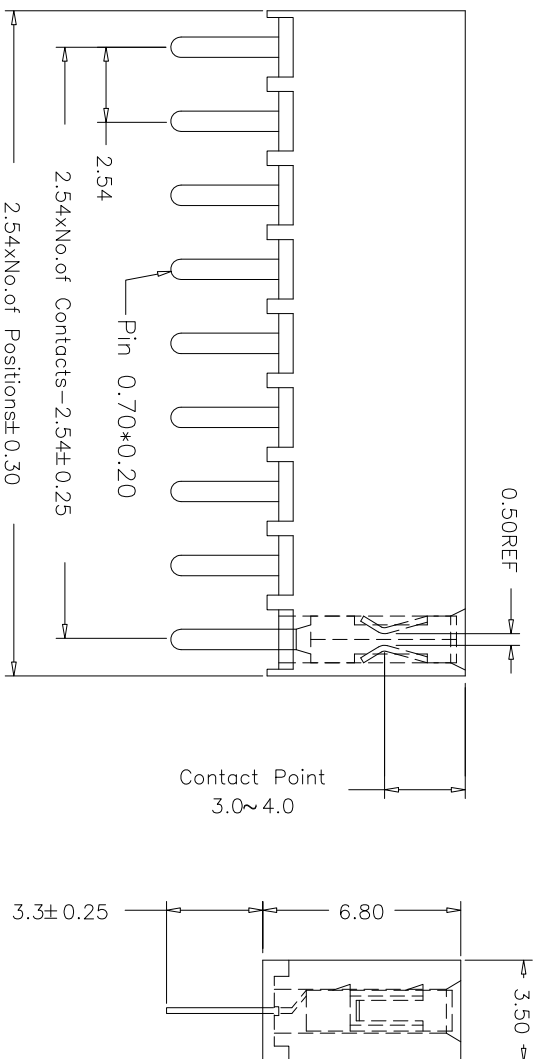

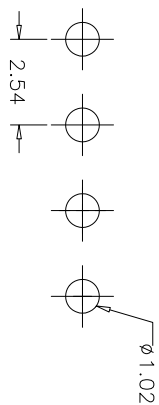


NOTES:

- Current Rating: 3.0AMP
- Contact Resistance: 20mΩ max.
- Insulation Resistance: 1000mΩ Min.
- Withstand Voltage: 600V AC/DC.
- Operation Temperature: -40°C to +105°C.
- Contact Material: Phosphor Bronze.
- Insulator Material: Polyester,(UL94V-O)

Ordering Information

BT2168 T 1 * * * B 1 A03

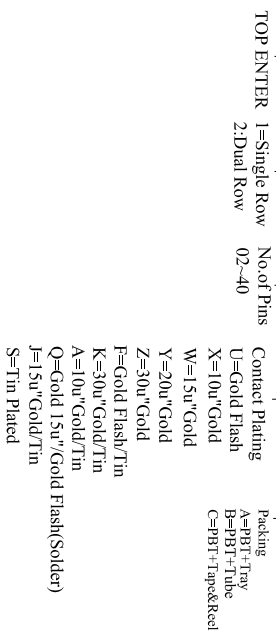

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	heming	SCALE	PART NO.	TITLE:
A0	09/01/18	NEW			XX ±0.40	DESIGN		mm	BT2168T1**B1A03	Plg 2.54, H 6.8mm Single Row DIP=3, 3mm Top Enter.
					X.XX ±0.25	CHECK	Shine	A4		
					Angle ± 3	APPROVE	Bill1	1/1		
					DIM					
					TOL					

