




HSP

- NOTES:
- Rated Current: 7.0A AC,DC
 - Rated Voltage:250V AC,Maximum
 - Withstand Voltage:1500V AC/minute
 - Insulation Resistance:1000M min
 - Operation Temperature:-40°C to +105°C
(Including temperature rise in applying electrical current)
 - Contact resistance:Initial Value/10mmax
After environmental Texting/20m
 - Contact Material:Phosphor Bronze
 - Insulator Material: Nylon 66,(UL94V-0)

Ordering Information

BT3964 H * * N 01 A11

No. of pins Color Packing
 02P~25P N:Natural 0:PE Bag
 W=White 1:Tray
 2:Tube
 3: Tape&Reel

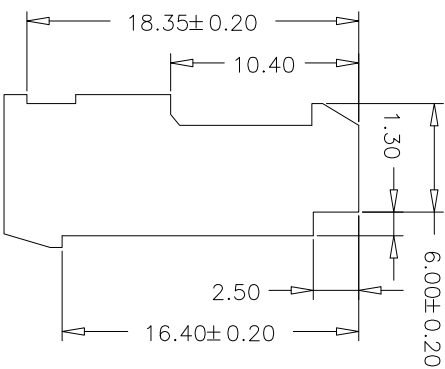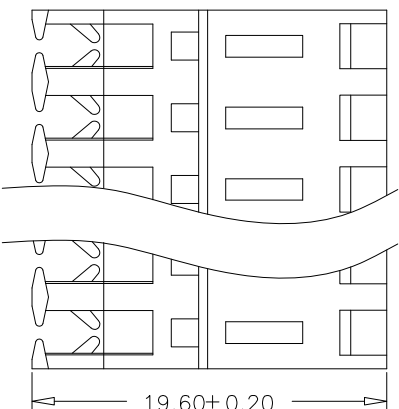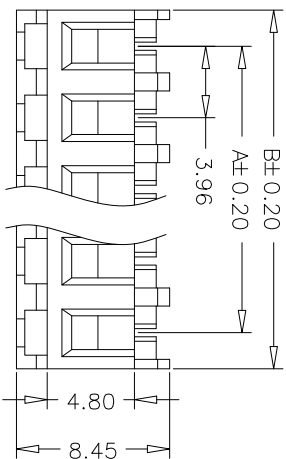

PART NO.	Dimensions	
	A	B
BT3964H02N01	3.96	7.92
BT3964H03N01	7.92	11.88
BT3964H04N01	11.88	15.84
BT3964H05N01	15.84	19.80
BT3964H06N01	19.80	23.76
BT3964H07N01	23.76	27.72
BT3964H08N01	27.72	31.68
BT3964H09N01	31.68	35.64
BT3964H10N01	35.64	39.60
BT3964H11N01	39.60	43.56
BT3964H12N01	43.56	47.52
BT3964H13N01	47.52	51.48
BT3964H14N01	51.48	55.44
BT3964H15N01	55.44	59.40
BT3964H16N01	59.40	63.36
BT3964H17N01	63.36	67.32
BT3964H18N01	67.32	71.28
BT3964H19N01	71.28	75.24
BT3964H20N01	75.24	79.20
BT3964H21N01	79.20	83.16
BT3964H22N01	83.16	87.12
BT3964H23N01	87.12	91.08
BT3964H24N01	91.08	95.04
BT3964H25N01	95.04	99.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	Zhangyali in	09/01/19	SCALE		SHEET	1/1	PART NO.	BT3964H**N01A11
					XX	±0.50				UNIT	mm				
A0	09/01/19	NEW			XXX	±0.30	DESIGN				A4				
					X XXX	±0.15	CHECK								
					Angle	± 3'	CHECK								
					DWG	TOL	APPROVE								



BMA TECHNOLOGIES LTD

MX3.96mm Pitch IDT Housing