

RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Specifications:

- Current Rating: 3.0AMP
- Contact Resistance: 20m Ω Max
- Withstand Voltage: 600V AC/DC
- Insulation Resistance: 1000M Ω Min
- Operation Temperature: -40°C to +105°C

Material:

- Contact Material: Copper Alloy
- Insulator Material: PA6T (UL94V-0)

Ordering Information

BT1220 1 ** * ** L 4 A84




1=Single Row


No.of Pins
01~40

Contact Plating
U=Gold Flash
X=10u"Gold
W=15u"Gold
Y=20u"Gold
Z=30u"Gold
S=Tin Plated

Pin length
See Table

Insulation & Packing
L=PA6T+PE Bag

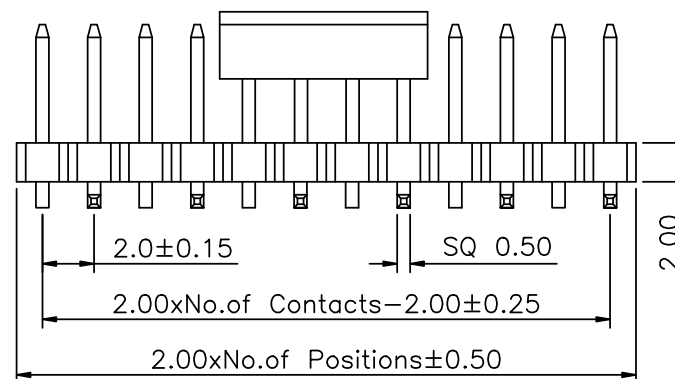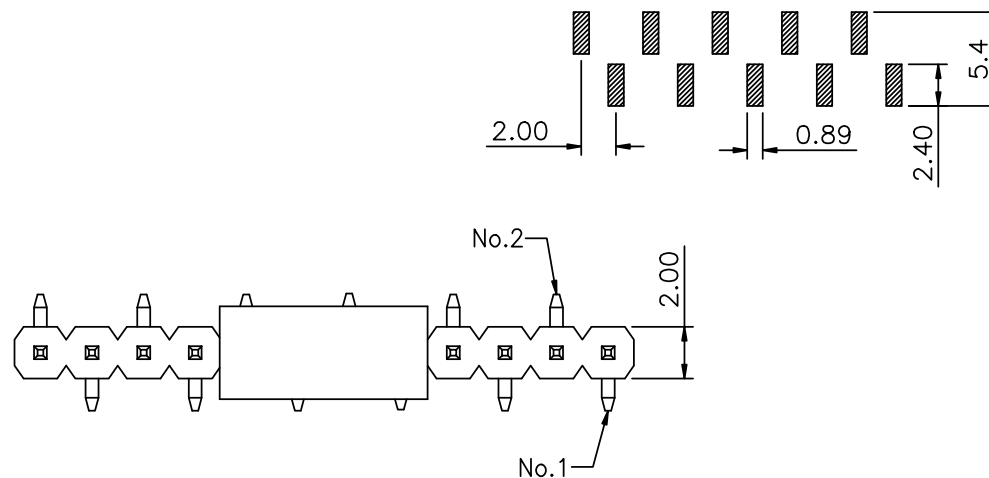

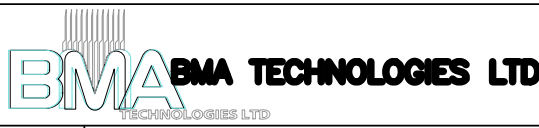					OPERATION	DRAW	He ming	Apr-18-2013	SCALE	-		
					X.X	±0.40			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
AO	Apr-18-2013	NEW			Angle	± 3°	CHECK	Jack	Apr-18-2013	PART NO.	BT12201*****L4A84	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	CK	Apr-18-2013	PROJ.	TITLE:	Pitch:2.0 Single Row Pin Header SMT

BT12201系列 Pin针长度对照表

Item No	A	D	W	Item No	A	D	W
01	4.00	2.50	4.20				
02							
03							
04							
05							
06							
07							
08							
09							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							
21							
22							
23							
24							
25							
26							
27							
28							
29							
30							
31							
32							
33							
34							
35							
36							
37							
38							
39							
40							
41							
42							
43							
44							
45							

备注: Item No列 01、02……n均表示料号BT12201***01*4***中粗斜体部分“01”,即Pin 长度,以此类推。