

RoHS





Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Specifications:

- Current Rating: 2Amp
- Contact Resistance: 20m Ω Max
- Withstand Voltage: 500V AC
- Insulation Resistance: 1000M Ω Min
- Operation Temperature: -40°C to +105°C

Material:

- Contact Material: Brass
- Insulator Material: Nylon 6T (UL94V-0)

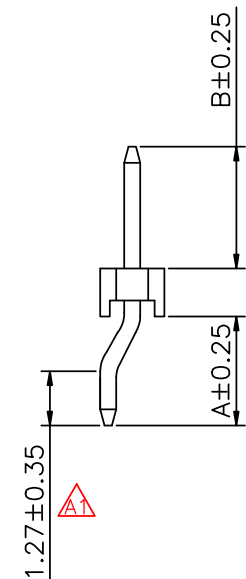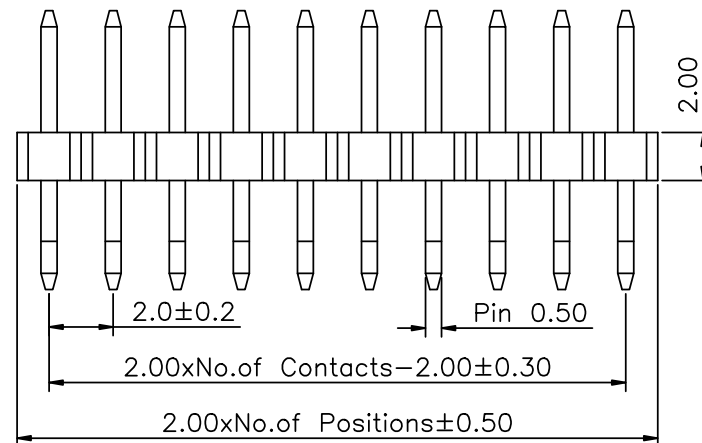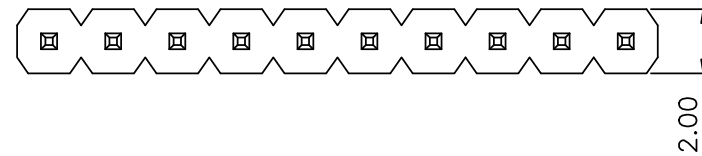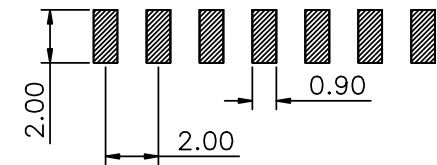

Ordering Information

BT1220 1 * * * * 3 A84


No.of Pins
02~80

Contact Plating
U=Gold Flash
S=Tin Plated

Pin length
See Table

Insulation & Packing
J=PA6T+Tube
K=PA6T+Tape&Reel
L=PA6T+PE Bag



					OPERATION		DRAW	He ming	Aug-24-2012	SCALE	—		
					X.X	±0.40	DESIGN			UNIT	mm		
					X.XX	±0.25				SIZE	A4		
A1	Aug-24-2012	Change Dimensions And Description	_____	_____	X.XXX	±0.15	CHECK	Jack		SHEET	1/1	PART NO.	BT12201*****3A84
A0	May-14-2011	NEW	_____	_____	Angle	± 3°	APPROVE	CK		PROJ.		TITLE:	Pitch:2.0 Pin Header Single Row SMT Type Base:2.0H
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL							

BT12201系列 Pin针长度对照表

Item No	A	B	Item No	A	B
01	2.79	4.45			
02					
03					
04					
05					
06					
07					
08					
09					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					
31					
32					
33					
34					
35					
36					
37					
38					
39					
40					
41					
42					
43					
44					
45					
备注: Item No列 01、02……n均表示料号BT12201xxx <i>01</i> *3xxx中粗斜体部分“01”,即Pin 长度,以此类推。					