

RoHS

NOTES:

- Current Rating:2.0A
- Contact Resistance:20mΩ Max
- Withstand Voltage:500V AC
- Insulation Resistance:1000MΩ Min
- Operation Temperature:-40℃ to +105℃

Material:

- Contact Material:Brass
- Contact plating:Gold Flash
- Insulator Material: PBT+30%G.F(UL94V-O)

Ordering Information

BT12202 * * * * 1 B148





No.of Pins
02~80

Contact Plating
U=Gold Flash
S=Tin Plated

Pin Length
See Table

Insulation & Packing
D=PBT + PE Bag

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

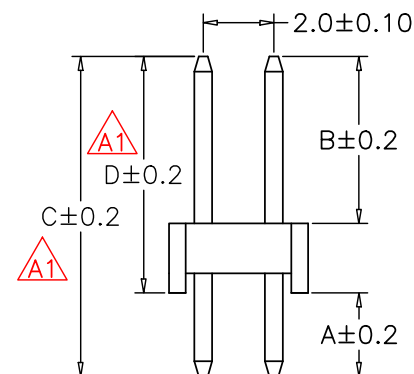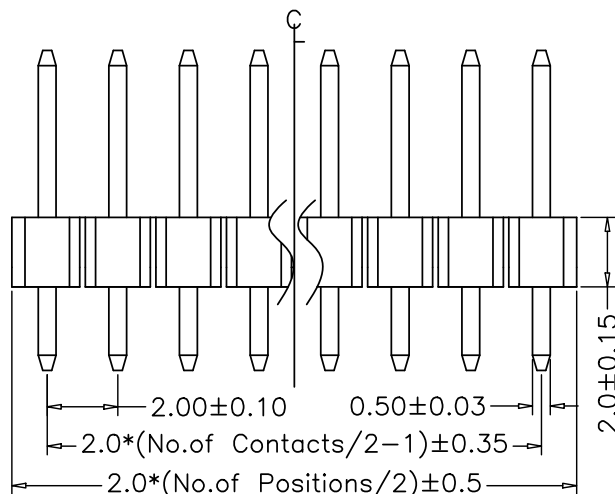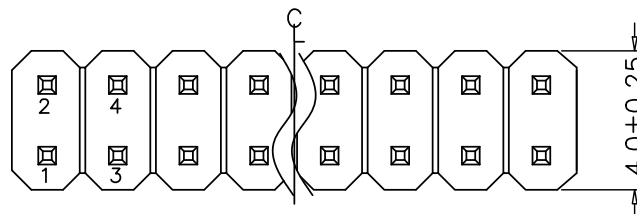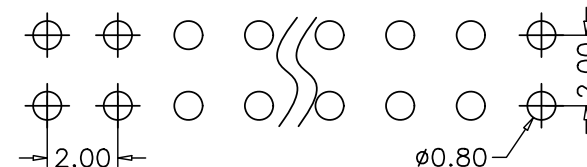

				OPERATION		DRAW	Jiao	Nov-03-2021	SCALE	-		
				X.X	±0.40	DESIGN			UNIT	mm		
				X.XX	±0.25				SIZE	A4		
				X.XXX	±0.15	CHECK	Qiu	Nov-03-2021	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	APPROVE	Arong	Nov-03-2021	PROJ.	◆	TITLE:	PH2.00 Dual Row 180°H=2.0

BT12202系列 Pin针长度对照表

Item No	A	B	C	D	Item No	A	B	C	D
01	2.60	3.50	8.10	5.50					
02	3.00	4.00	9.00	6.00					
03	3.00	3.00	8.00	5.00					
04	2.80	4.00	8.80	6.00					
05	2.80	3.90	8.70	5.90					
06	2.10	4.00	8.10	6.00					
07	2.80	8.70	13.50	10.70					
08	2.50	3.00	7.50	5.00					
09	3.00	13.00	18.00	15.00					
10	13.00	3.00	18.00	5.00					
11	2.80	2.80	7.60	4.80					
12	2.80	4.50	9.30	6.50					
13	2.60	6.00	10.60	8.00					
14	2.00	6.00	10.00	8.00					
15	2.80	3.60	8.40	5.60					
16	2.50	3.70	8.20	5.70					
17									
18									
19									
20									
21									
22									
23									
24									
25									
26									
27									
28									
29									
30									
31									
32									
33									
34									
35									
36									
37									
38									
39									
40									
41									
42									
43									
44									
45									

备注：Item No列 01、02……n均表示料号BT12202xxx*01*x1xxx中粗斜体部分“01”，即Pin 长度，以此类推。