

RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Specifications:


- Current Rating: 3.0AMP
- Contact Resistance: 20m Ω Max
- Withstand Voltage: 500V AC
- Insulation Resistance: 1000M Ω Min
- Operation Temperature: -40°C To +105°C

Material:

- Contact Material: Phosphor Bronze
- Insulator Material: NL9T+30%G.F, (UL94V-0)

Ordering Information
BT2135 1 ** * * 1 B148

1=Single Row
No.of Pins
02~40
Contact Plated
U=Gold Flash
S=Tin Plated
Z=30U" Gold Plating
Packing
3=Tape & Reel

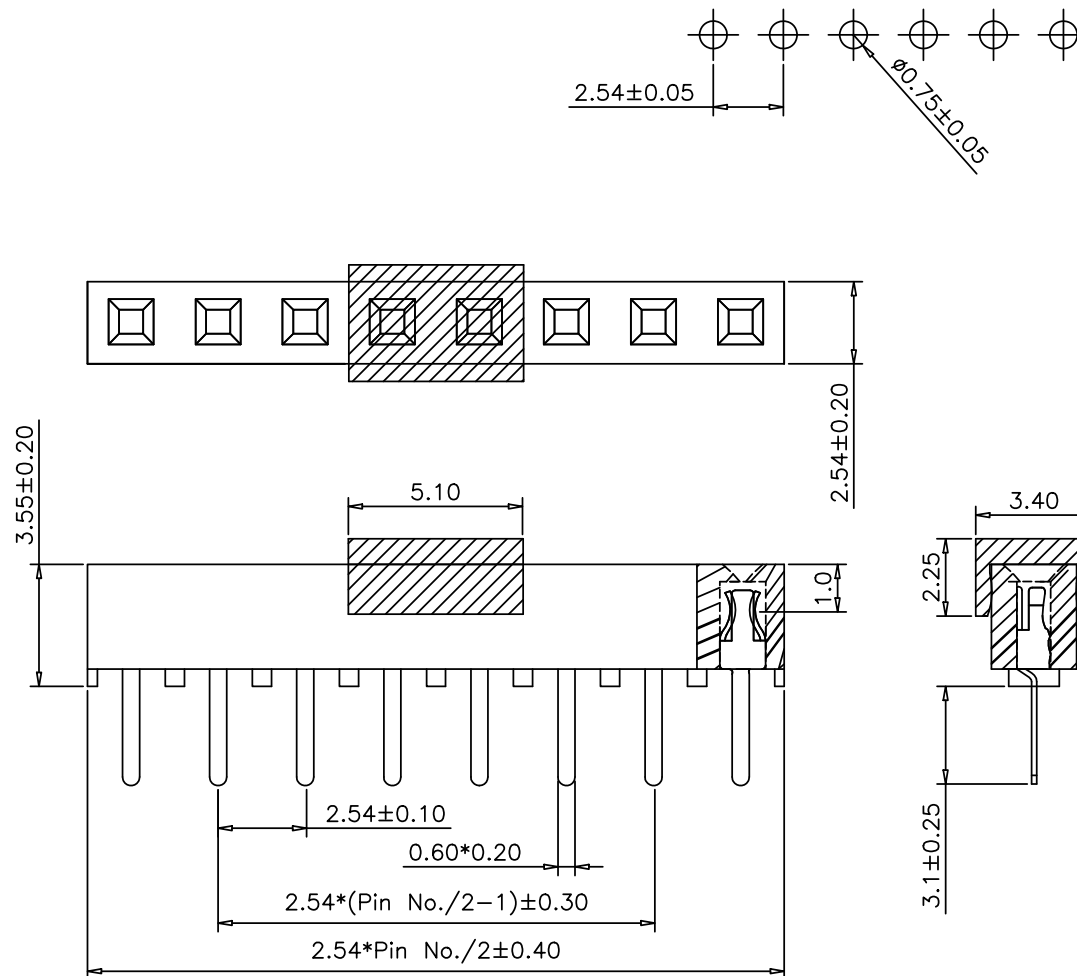

					OPERATION		DRAW	Chen lin	Oct-13-2020	SCALE	-	 BMA TECHNOLOGIES LTD TECHNOLOGIES LTD	
A2	Oct-13-2020	Increase 30U gold plating	_____	_____	X.X	±0.40	DESIGN			UNIT	mm		
A1	Jul-19-2020	Change PCB Hole	_____	_____	X.XX	±0.30	CHECK	Arong	Jul-19-2020	SIZE	A4		
A0	Jun-3-2020	NEW	_____	_____	X.XXX	±0.20				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3°	APPROVE	Nicki	Jul-19-2020	PROJ.		TITLE:	Pitch:2.54 Female Header Single Row Dip Type H:3.5
					DIM	TOL							