

RoHS

Specifications:

- Current Rating: 3Amp
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C

Material:

- Contact Material: Phosphor Bronze
- Insulator Material: PA9T+30%G.F.(UL94V-0)
- Finish: Gold Flash

Ordering Information

BT2135 2 ** U * R B148





2=Dual Row


No.of Pins
04~80

Contact Plating
U=Gold Flash

Insulation & Packing
U=PA9T+Tray
V=PA9T+Tube
W=PA9T+Tape&Reel
X=PA9T+PE Bag

Recommended P.C.B Layout(Bottom Side)
(PCB BOARD TOLERANCE±0.05)

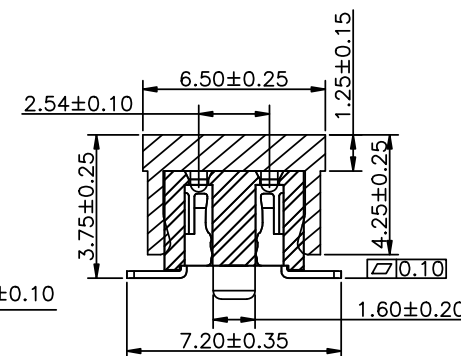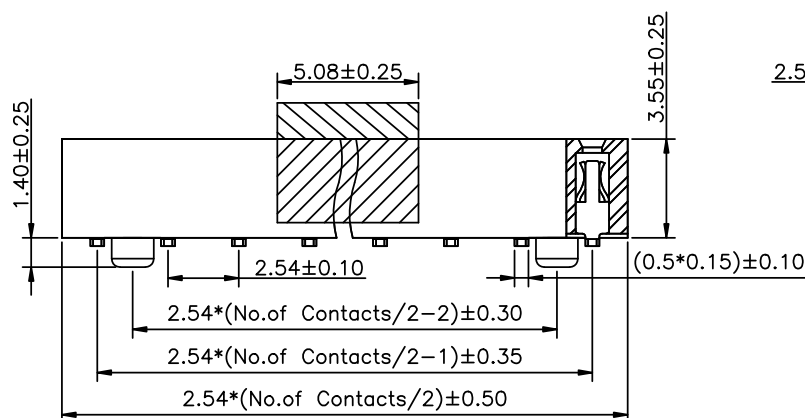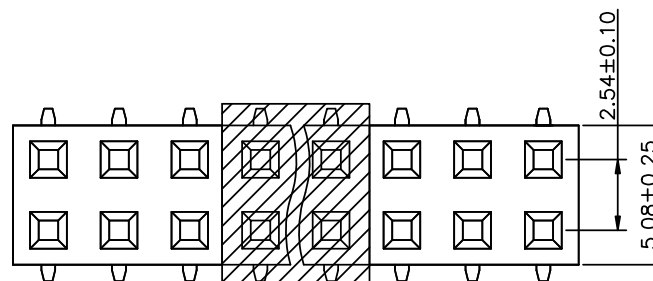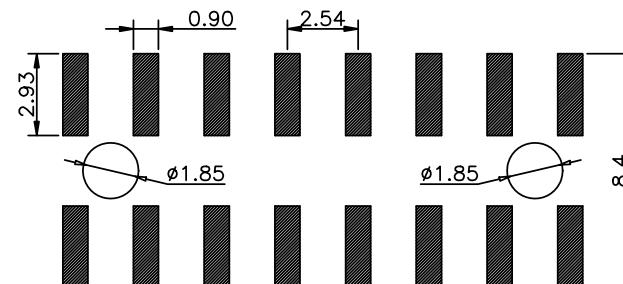

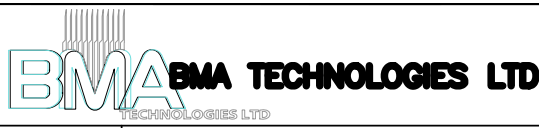						OPERATION	DRAW	Arong	Sep-11-2015	SCALE	—	 BMA TECHNOLOGIES LTD	
						X.X ±0.45	DESIGN			UNIT	mm		
						X.XX ±0.30				SIZE	A4		
						X.XXX ±0.20	CHECK	Jim		SHEET	1/1	PART NO.	BT21352**U*RB148
AO	Sep-11-2015	NEW				Angle ± 3'	APPROVE	Jerry		PROJ.		TITLE:	Pitch:2.54 Female Header Dual Row H:3.55 SMT
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM TOL							

1 2 3 4 5 6 7 8 9 10