

RoHS





Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

NOTES:

- Current Rating: 3.0AMP
- Contact Resistance: 20m Ω Max
- Withstand Voltage: 600V AC/DC
- Insulation Resistance: 1000M Ω Min
- Operation Temperature: -40°C to +105°C

Material:


- Contact Material: Phosphor Bronze
- Contact plating: Au or Sn Over Ni
- Insulator Material: PBT(UL94V-0)

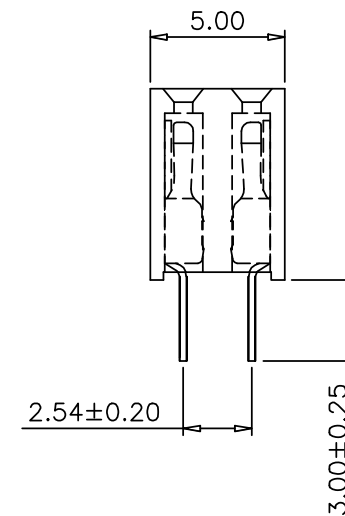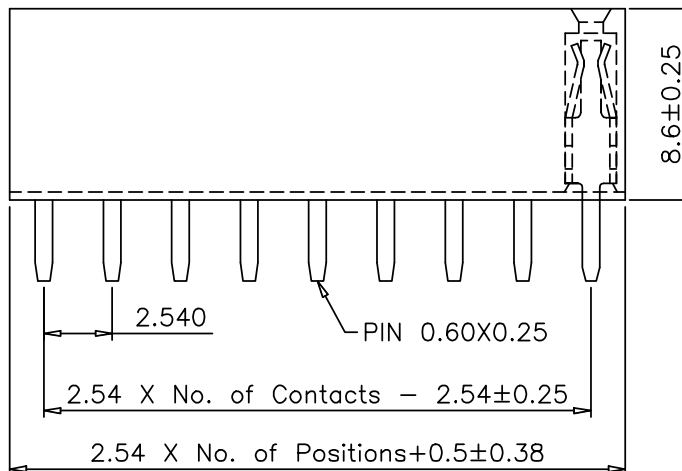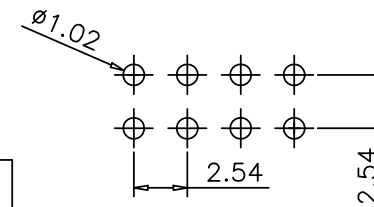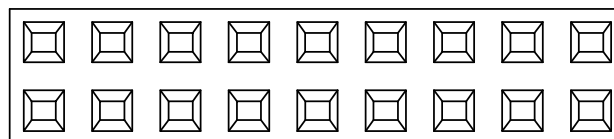

Ordering Information

BT2185 2 ** * A S A84

- 2=Double Row No.of Pins 04~80 Contact Plating U=Gold Flash X=10u"Gold W=15u"Gold Y=20u"Gold Z=30u"Gold Insulation & Packing A=PBT + Tray

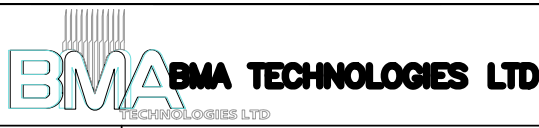					OPERATION	DRAW	Puyongjang	Dec-21-2015	SCALE	—		
					X.X	± 0.45			UNIT	mm		
					X.XX	± 0.30			SIZE	A4		
					X.XXX	± 0.20			SHEET	1/1		
AO	10/08/16	NEW			Angle	$\pm 3^\circ$	FOX	Dec-21-2015	PART NO.	BT21852***ASA84		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	Wendy	Dec-21-2015	PROJ.	TITLE:	FH2.54 Dual R/A Female Header H=8.50mm	