

RoHS

Specifications:

- Current Rating: 2A
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40℃ to +105℃

Material:

- Contact Material :C5191
- Insulator Material :Polyester,UL 94V-0
- Standard :PA9T (无卤)
- Standard :Gold Flash

Ordering Information




BT2243 1 ** * * 1HF B148


No.of Pins
02~40

Contact Plating
U=Gold Flash

Insulation & Packing
V=PA9T+Tube

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

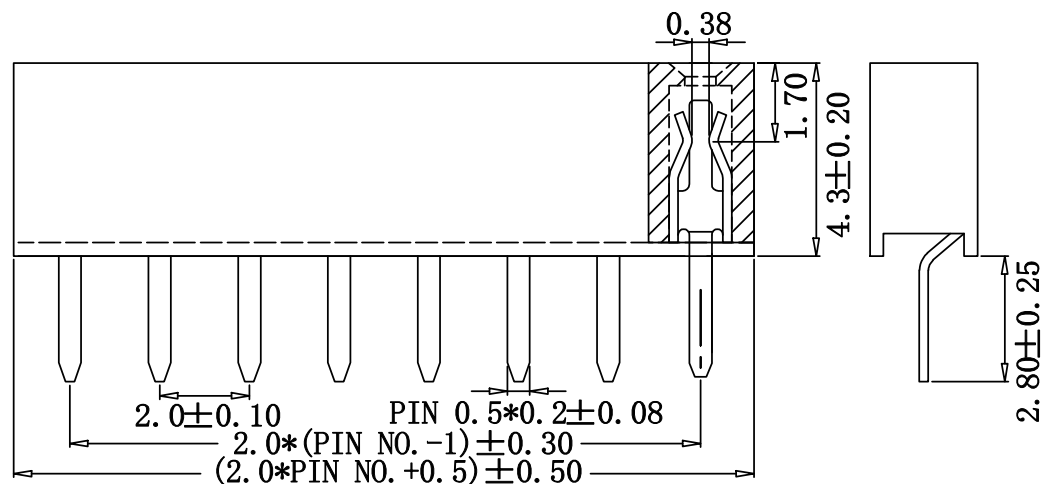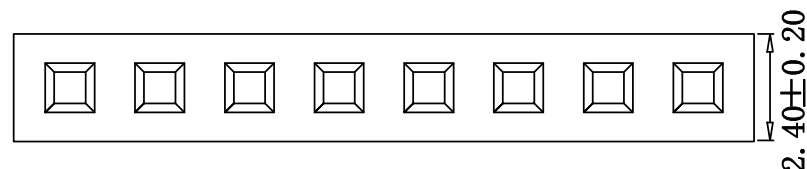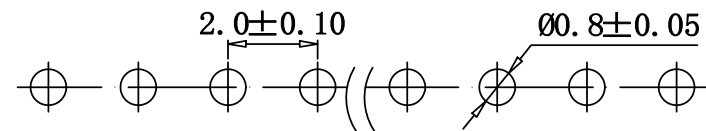

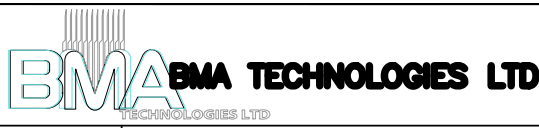					OPERATION	DRAW	Jason	May-22-2024	SCALE	-		
					X.X	±0.45			UNIT	mm		
					X.XX	±0.30			SIZE	A4		
					X.XXX	±0.20			SHEET	1/1		
AO	May-22-2024		NEW		Angle	± 3°	CHECK	Arong	PART NO.	BT22431****1HFB148		
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	Tom	PROJ.	TITLE:	Pitch:2.0 Female Header Single Row 180° H:4.3	