

RoHS



Specifications:

- Current Rating: 2AMP
- Insulation Resistance: 1000M Ω Min
- Contact Resistance: 20m Ω Max
- Dielectric Withstanding: AC 500V
- Operation Temperature: -40°C to +105°C

Material:

- Contact Material: C5191
- Insulator Material: NL6T+30% G.F (UL94V-0)
- Contact Plating: Gold Flash All Over Nickel



Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance ± 0.05)

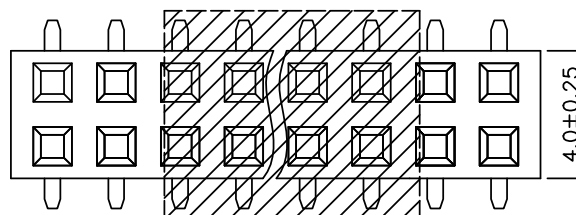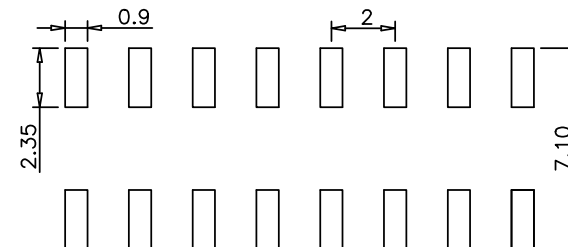


Ordering Information

BT2243 2 * * * 8 B148

2=Dual Row
No.of Pins
04~80
Contact Plating
U=Gold Flash
Insulation & Packing
K=NL6T + Tape&Reel

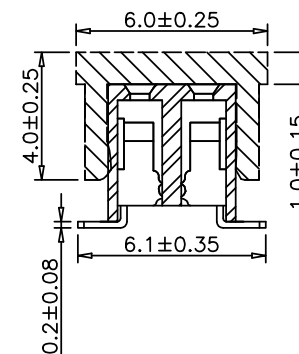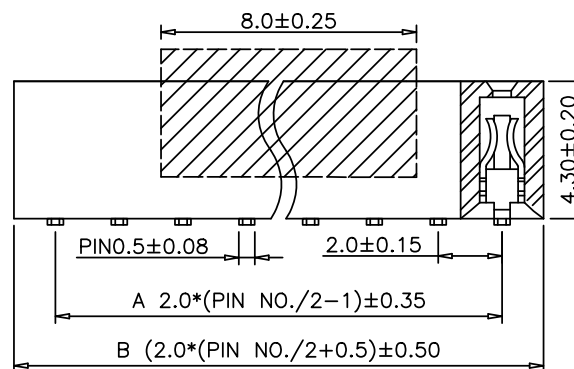

PIN NO.	DIMENSION	
	A	B
2*2	2.0	4.5
2*3	4.0	6.5
2*4	6.0	8.5
2*5	8.0	10.5
2*6	10.0	12.5
2*7	12.0	14.5
2*8	14.0	16.5
⋮	⋮	⋮
2*40	78.0	80.5

					OPERATION		DRAW	Jiao	Sep-10-2019	SCALE	—			
					X.X	±0.40	DESIGN			UNIT	mm			
					X.XX	±0.30		SIZE	A4					
					X.XXX	±0.15	CHECK	Peng	Sep-10-2019	SHEET	1/1	PART NO.	BT22432****8B148	
AO	Sep-10-2019	NEW		_____	_____	Angle	± 3'	APPROVE	Arong	Sep-10-2019	PROJ.		TITLE:	Pitch:2.0 Female Header SMT Type W/Cap
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL							