


RoHS

SPECIFICATIONS:

- Rated Current: 1.0 AMP.
- Withstand Voltage: 500V AC/minute.
- Insulation Resistance: 1000M Ω min.
- Operation Temperature: -55°C to + 105°C.
- Contact Material: Brass.
- Contact Plating: Au or Tin over Ni
- Shell Material: Steel, Nickel/Tin Plated.
- Insulator Material: PBT+35% Glass Fiber(UL94V-0).

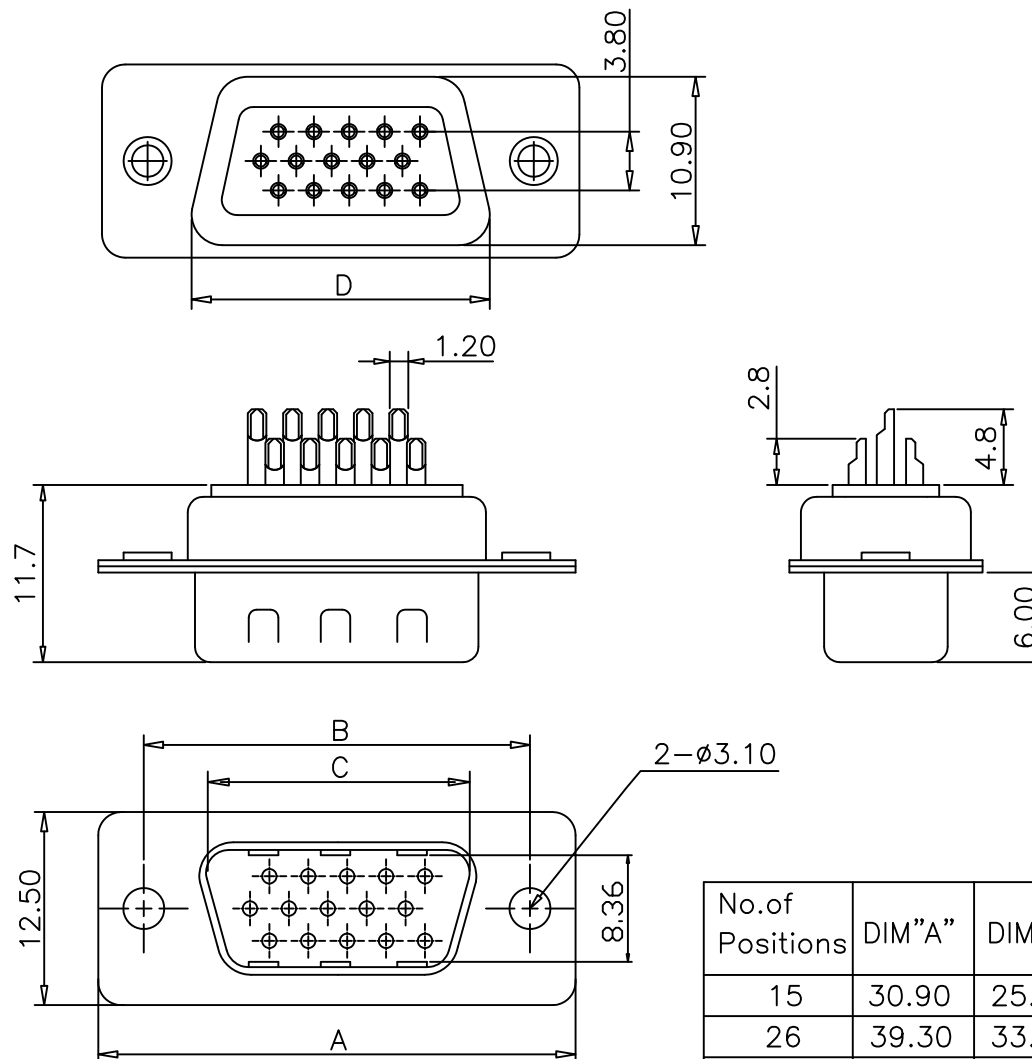

Ordering Information

BT6212 ** M * * A 1 B8A

No. of pins
15Pin
26Pin
44Pin
62Pin

M=Male
Contact Plating
F=Gold Flash/Tin

Color
B=Black
U=Blue

Material & Packing
A=PBT+Tray

No. of Positions	DIM"A"	DIM"B"	DIM"C"	DIM"D"
15	30.90	25.00	16.92	19.30
26	39.30	33.30	25.25	27.70
44	53.10	47.10	38.96	41.20
62	69.50	63.50	55.42	57.50

					OPERATION	DRAW	Qiuzhirong	2010. 04. 25	SCALE	-	 BMA TECHNOLOGIES LTD	
					X.X	± 0.40			UNIT	mm		
					X.XX	± 0.25			SIZE	A4		
					X.XXX	± 0.15			SHEET	1/1		
AO	10/04/25		NEW		Angle	$\pm 3^\circ$	CHECK	Zhangyalin		PART NO.	BT6212**M**A1B8A	
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	CK	PROJ.	TITLE:	HDB Male Connector Solder Type	