




RoHS

Specifications:

- Rated Current: 5.0AMP
- Withstand Voltage: 500V AC/minute
- Insulation Resistance: 100M Ω Min At 500V DC
- Contact Resistance: 30m Ω
- Operation Temperature: -55°C to +105°C

Material:

- Contact: Brass
- Contact Plating: Gold Flash Or Tin Plated
- Shell Material: Steel, Front Nickel Plated
Back Tin Plated
- Insulator Material: PBT+Glass-Fibre(UL94V-0)

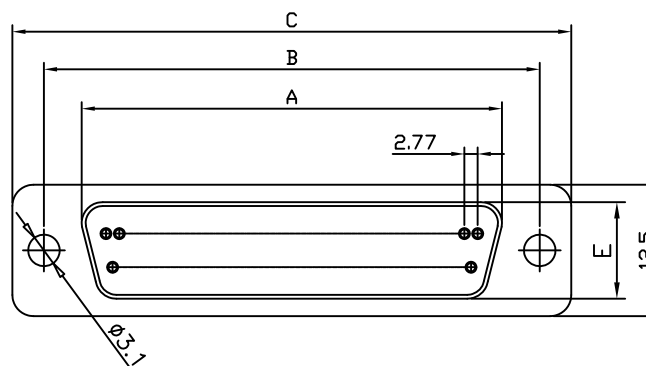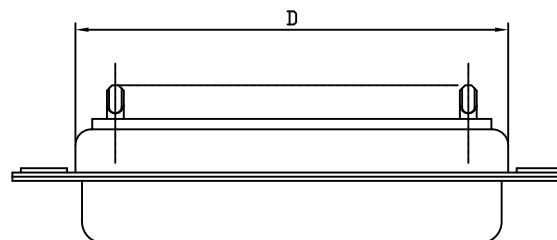

Ordering Information

BT6222 ** F * B A 1 B8A

No. of pins
09=09Pin
15=15Pin
25=25Pin
37=37Pin

F=Female

Contact Plating
F=Gold Flash/Tin

Color
B=Black
U=Blue

Material & Packing
A=PBT+Tray

No. of Positions	DIM"A"	DIM"B"	DIM"C"	DIM"D"	DIM"E"
	±0.35	±0.20	±0.40	±0.35	±0.35
09	16.33	24.99	30.81	19.28	7.90
15	24.66	33.32	39.14	27.51	7.90
25	38.38	47.04	53.04	41.43	7.90
37	54.84	63.50	69.32	57.71	7.90

					OPERATION	DRAW	Huangming	Oct-22-2013	SCALE	—	 BMA TECHNOLOGIES LTD	
					X.X ±0.25	DESIGN			UNIT	mm		
					X.XX ±0.15				SIZE	A4		
					X.XXX ±0.10	CHECK	Arong	Oct-22-2013	SHEET	1/1		
AO	Oct-22-2013	NEW			Angle ± 3'	APPROVE	jack	Oct-22-2013	PART NO.		BT6222**F*BA1B8A	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL				TITLE:		D-Sub Female Connector, Solder Type	