



RoHS

Specifications:

- Rated Current: 5.0AMP
- Withstand Voltage: 500V AC/minute
- Insulation Resistance: 100M Ω Min At 500V DC
- Contact Resistance: 30m Ω
- Operation Temperature: -55°C to +105°C

Material:

- Contact: Brass
- Contact Plating: Au Or Sn Over Ni
- Shell Material: Steel, Front Nickel Plated
Back Tin Plated
- Insulator Material: PBT+Glass-Fibre(UL94V-0)

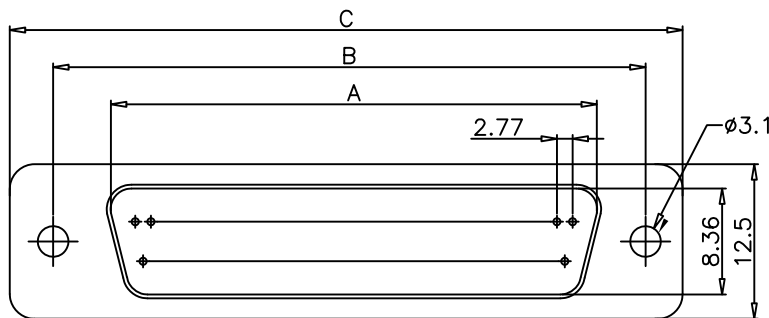

Ordering Information

BT6222 ** M * B A 1 B8A

No. of pins
09=09Pin
15=15Pin
25=25Pin
37=37Pin

M=Male

Contact Plating
F=Gold Flash/Tin
K=Gold 30u"

Color
B=Black
U=Blue

Material & Packing
A=PBT+Tray

No. of Positions	DIM"A"	DIM"B"	DIM"C"	DIM"D"
09	16.92	24.99	30.81	19.28
15	25.25	33.32	39.14	27.51
25	38.96	47.04	53.04	41.43
37	55.42	63.50	69.32	57.71

					OPERATION		DRAW	Chenran	2010/04/19	SCALE	—	 BMA TECHNOLOGIES LTD TECHNOLOGIES LTD		
					X.X	±0.25	DESIGN			UNIT	mm			
					X.XX	±0.15				SIZE	A4			
					X.XXX	±0.10	CHECK	Yalin	2010/04/19	SHEET	1/1			PART NO.
AO	10/04/19	NEW		_____	_____	Angle	± 3°	APPROVE	CK	2010/04/19	PROJ.		TITLE:	D—Sub Male Connector, Solder Type
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL							