



RoHS

Specification:

-Material: Brass

-Finish: Tin Plated

Width of docking male end	Wire Range AWG	Dimension								Terminal P/N Connection Table: 0.8mm	Terminal P/N Connection Table: 0.5mm
		W	E	L	WS	H1	IS	H2	T		
.250"(6.35mm)	12-16AWG	7.5	7.5	19	4.2	4.55	7.0	6.15	0.4	BTFT250FCC8A06	BTFT250FCC5A06
	16-18AWG	7.5	7.6	17.15	3.0	3.3	4.6	4.5	0.4	BTFT250FNC8A06	BTFT250FNC5A06
	18-22AWG	7.5	7.5	19	3.0	2.8	4.0	4.1	0.4	BTFT250FLC8A06	BTFT250FLC5A06
.187"(4.75mm)	12-14AWG	5.75	6.7	15.6	3.9	4.0	5.5	5.7	0.35	BTFT187FFC8A06	BTFT187FFC5A06
	20-24AWG	5.6	5.8	15.5	1.8	2.2	3.0	3.2	0.3	BTFT187F0C8A06	BTFT187F0C5A06
.110"(2.80mm)	18-22AWG	3.8	6.3	15.6	2.6	3.0	4.3	4.2	0.25	BTFT110FLC8A06	BTFT110FLC5A06
	20-24AWG	3.8	6.3	15.6	2.5	2.3	3.5	3.2	0.25	BTFT110F0C8A06	BTFT110F0C5A06

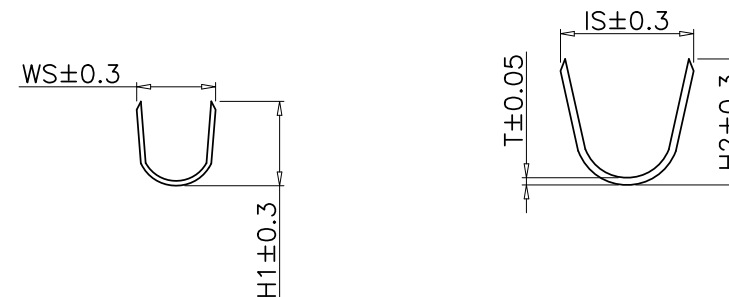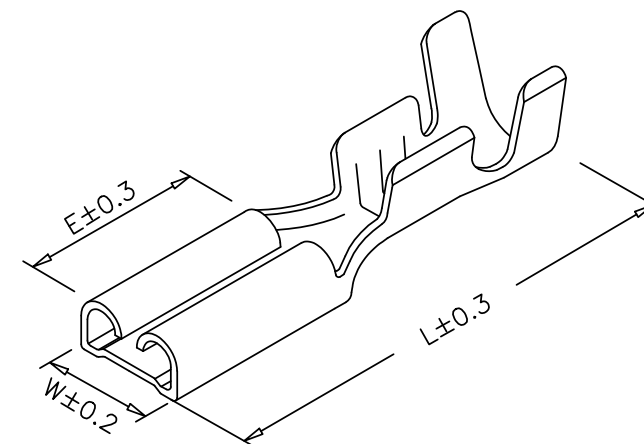

					OPERATION		DRAW	Jiao	Aug-13-2026	SCALE	-	 BMA TECHNOLOGIES LTD	
					X.X	±0.35	DESIGN			UNIT	mm		
					X.XX	±0.25				SIZE	A4		
					X.XXX	±0.15				SHEET	1/1		
AO	Aug-13-2026	NEW				Angle	± 3°	CHECK	Qiu	Aug-13-2026	PART NO.	BTFTxxxxxxA06	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	APPROVE	Arong	Aug-13-2026	PROJ.	TITLE:	Female Terminal