

RoHS





Specification:

- Current Rating: 1.5 Amp
- Voltage Rating: 30V AC
- Withstanding Voltage: AC 500V
- Insulation Resistance: 1000M Ω Min
- Contact Resistance: 30m Ω Max
- Operating Temperature: -55°C ~ +85°C

Material:

- Insulator: PBT(UL94V-0)
- Contact: Copper Alloy
- Contact Plated : Gold Or Tin Over Nickel Plated
- Shell: Steel or Brass,Nickel Plated

RECOMMENDED P.C.B LAYOUT(TOP SIDE) (PCB BOARD TOLERANCE ± 0.05)

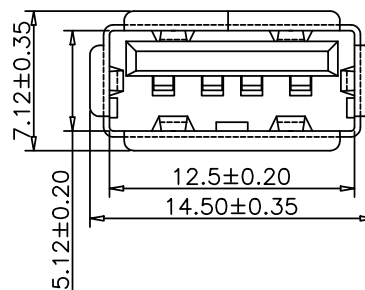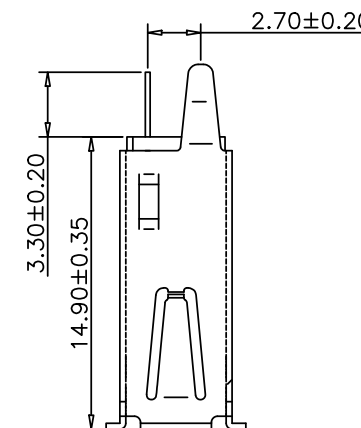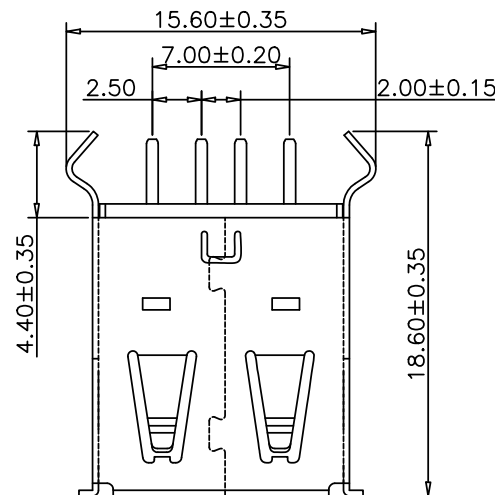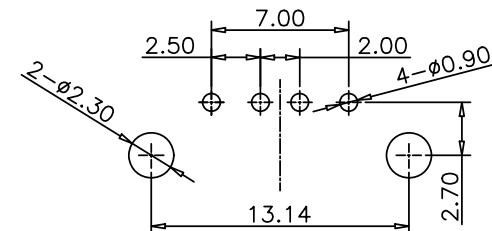

Ordering Information

BT USBA F S * * * 2 B49

USB A Type F: Female S: Straight Contact Plating Color Insulator Shell Material
F=Gold Flash/Tin W=White A=Brss
K=30u"Gold/Tin B=Black B=Steel

					OPERATION	DRAW	Qiuzhirong	09/11/25	SCALE	—		
					X.X ± 0.35	DESIGN			UNIT	mm		
					X.XX ± 0.20				SIZE	A4		
					X.XXX ± 0.15	CHECK	Shine		SHEET	1/1	PART NO.	BTUSBAFS***2B49
AO	09/11/25	NEW			Angle $\pm 3^\circ$	APPROVE	CK		PROJ.		TITLE:	USB A Female Connector 180°
REV	DATE	MODIFICATION DESCRIPTION			DIM TOL							