

RoHS








Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Specification:

- Current Rating : 1.5 Amp
- Voltage Rating: 30V AC
- Withstanding Voltage: 500V AC
- Insulation Resistance: 1000M Ω Min
- Contact Resistance: 30m Ω Max
- Operating Temperature: -55°C ~+85°C

Material:

- Insulator Material: LCP(UL94V-0)
- Contact Material: Copper Alloy
- Shell Material: Ferro Alloy, Nickel Plated

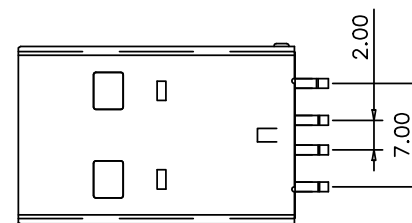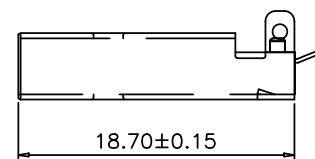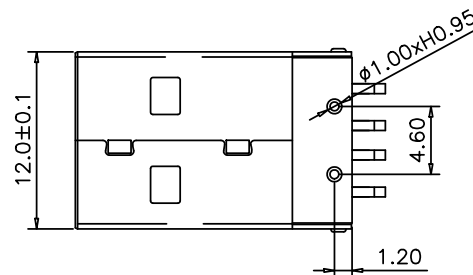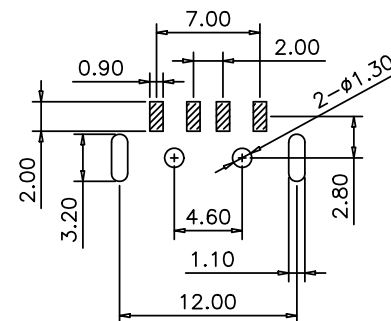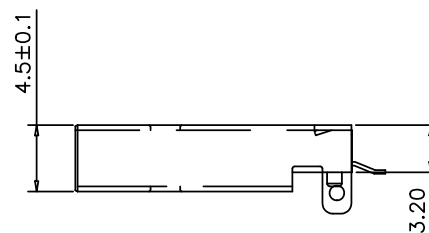

Ordering Information

BT USBA M M * * B 9 B49


USB Series

M= Male

M= SMT

Contact Plating
F=Gold Flash/Tin

Insulator Color
B=Black
W=White

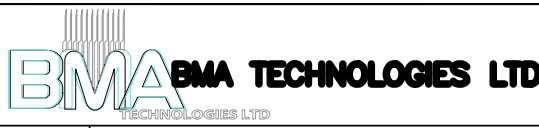						OPERATION	DRAW	He ming	Apr-02-2011	SCALE	—		
						X.X	±0.35	DESIGN		UNIT	mm		
						X.XX	±0.25	CHECK	Jack	SIZE	A4		
						X.XXX	±0.15	APPROVE	CK	SHEET	1/1		
AO	Apr-02-2011	NEW				Angle	± 3'			PART NO.	BTUSBAMM**B9B49		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL				TITLE:	USB A Male SMT Type		